



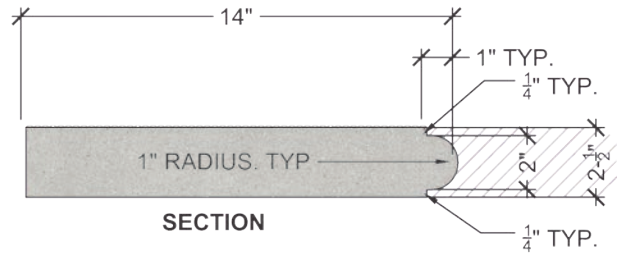

310.217.2378  
STEPSTONEDEALER.COM

**CLASSIC POOL COPING**

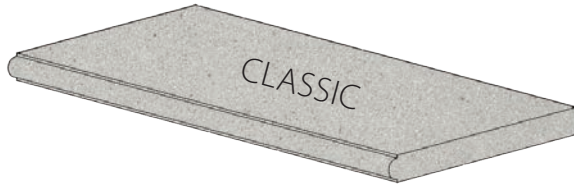

## SHORT FORM SPECIFICATION

SIZES:

CLASSIC  
14" X 24" X 2 1/2"  
INSIDE AND OUTSIDE CORNERS  
INSIDE RADIUS: 1', 2', 3', 4', 6', 8'  
OUTSIDE RADIUS: 2', 3', 4', 6', 8'  
1" RADIUS BULLNOSE WITH 1/4" TOP  
AND BOTTOM REVEAL

ALL SIZES ARE NOMINAL

MATERIAL: 4,000 PSI HARDROCK CONCRETE, TYPE III CEMENT

FINISH: STIPPLED, VERANOSTONE® OR HERMOSASTONE®

COLOR CHOICE: USING ACTUAL SAMPLES IS STRONGLY RECOMMENDED

DETAILS: VISIT STEPSTONEDEALER.COM FOR DRAWINGS, DIMENSIONS AND RADIUS FINDER

BUILDING CODE: CHECK WITH LOCAL JURISDICTIONS FOR REQUIREMENTS


GRANADA WHITE




FRENCH GRAY



ICEBERG GREEN



ALMOND



CAFE BROWN




CARAMEL




AGAVE



PORCELAIN




BRICK RED




KONA




PEBBLE



ADOBE



GRANADA WHITE



FRENCH GRAY



ICEBERG GREEN



ALMOND



CAFE BROWN



CARAMEL



AGAVE




PORCELAIN



BRICK RED



KONA



PEBBLE



ADOBE



PLEASE NOTE: ALL OF OUR PRODUCTS ARE MADE BY HAND FROM NATURAL MATERIALS. VARIATIONS IN COLOR ARE TO BE EXPECTED. TO CONFIRM COLOR, PLEASE REFER TO ACTUAL CONCRETE SAMPLES BEFORE PLACING ORDER. SHIPPING MAY RESULT IN MINOR CHIPPING. THIS IS NOT DETRIMENTAL TO APPEARANCE OR FUNCTION. STEPSTONE, INC. RECOMMENDS SEALING TO AID IN GROUT REMOVAL AND CLEANING PRIOR TO INSTALLATION. GROUT NATURALLY WILL BOND WITH CONCRETE. IMMEDIATELY REMOVE ANY GROUT SLURRY THAT COMES IN CONTACT WITH THE FINISHED FACE OF THE PRECAST CONCRETE PIECES. ALL SIZES ARE NOMINAL. SEE DETAILS FOR FURTHER INFORMATION. AVAILABLE IN OTHER STANDARD COLORS. **SEE ACTUAL COLOR CONCRETE SAMPLES BEFORE ORDERING.** THIS MATERIAL IS COPYRIGHTED AND IS INTENDED SOLELY FOR THE USE OF CUSTOMERS OF STEPSTONE, INC.